


# PLC SPLITTER CASSETTE & MODULES

- Low Insertion loss
- Low PDL
- Compact Design
- High Reliability and Stability



Whole series of 1xN and 2xN splitter modules that are tailored for specific applications. All products meet GR-1209-CORE-2001 and GR-1221-CORE-1999 requirements.

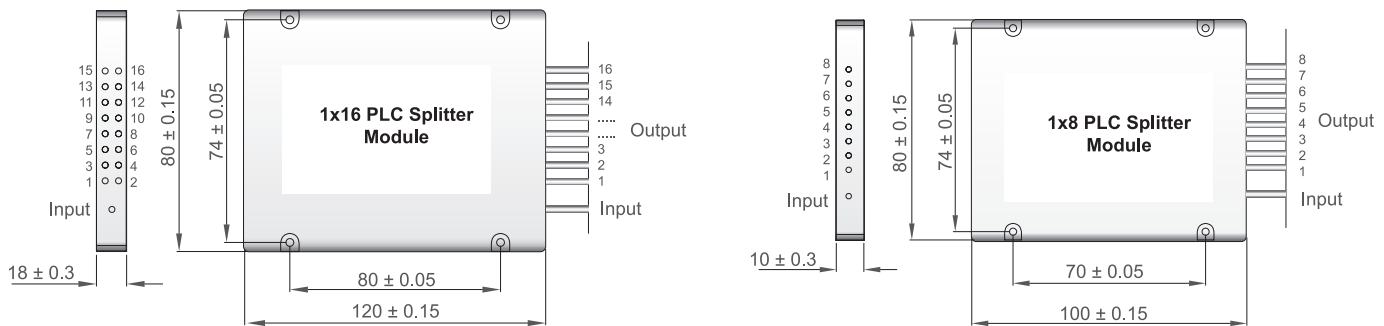

PARAMETERS	1X2 ~ 1X8	1X12 ~ 1X16	1X24 ~ 1X64	2X4 ~ 2X8	2X16	2X32 ~ 2X64	UNIT
L,W,H	100X80X10	120X80X18	140x114x18	100x80x10	120X80X18	140x114x18	mm
TYPE (Code)	TA	TB	TC	TA	TB	TC	

## DIMENSIONS

Custom Solution is also available.

CODE	INPUT-OUTPUT	CASSETTE TYPE	FIBER CABLE	CONNECTOR/ADAPTER INPUT	CONNECTOR/ADAPTER OUTPUT	FIBER LENGTH
F4M-PLCM	1X2 1 Input, 2 Outputs	TA 100X80X10	9L 900µm Loose Tube	0 None	0 None	10 1.0 m
	1X4 1 Input, 4 Outputs	TB 120X80X18	2M 2mm Cable	A SC/UPC	A SC/UPC	15 1.5m
	1X8 1 Input, 8 Outputs	TC 140X114X18	3M 3mm Cable	B SC/APC	B SC/APC	S Specify
	116 1 Input, 16 Outputs	LG LGX Metal Box		C FC/UPC	C FC/UPC	
	132 1 Input, 32 Outputs	MM Mini Module		D FC/APC	D FC/APC	
	164 1 Input, 64 Outputs	RM Rack Mount		E LC/UPC	E LC/UPC	
	2X2 2 Input, 2 Outputs	S Specify		Q LC/APC	Q LC/APC	
	2X4 2 Input, 4 Outputs			S Specify	S Specify	
	2X8 2 Input, 8 Outputs					
	216 2 Input, 16 Outputs					
	232 2 Input, 32 Outputs					
264 2 Input, 64 Outputs						

## ORDER CODES

ORDER CODE example: **F4M-PLCM -132 - TC - 2M -XS -XS - S**

\*Note:  
C or A indicating if Connector or Adapter as Input or Output

Specifications may change without notice. Display Product Photos Shown are samples for viewing, not actual products. Colours and styles may vary.

www.fiberon.com